


Steel – Fiberglass Swimming Pool Light Specification

Product Picture & Dimension

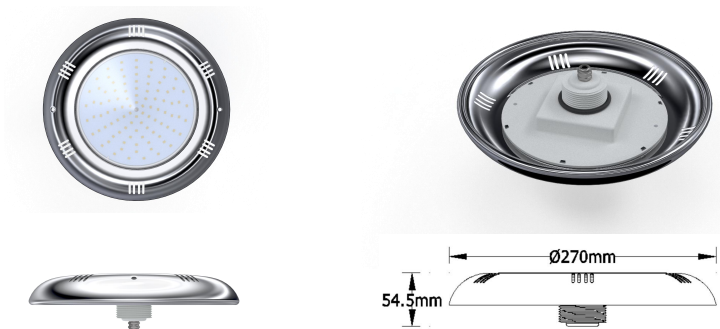

Caution

- * Steel – Fiberglass lamp is for underwater usage.
- * Used only with toroidal transformer(50-60Hz), electronic is not applicable.
- * Connected with water-proof connector or in water-proof manner for avoiding waterleakage risk.
- * Read carefully the instruction and specification before installation.
- * Do not carry lamp by cable in order to avoid risk of water-leakage.

Model No.	SP56-25W-F2 (White)	SP56-25W-F2 (White)
LED chip	SMD 2835	SMD 2835
Input Voltage	AC/DC 12V	AC/DC 12V
Frequency	50/60 Hz	50/60 Hz
Power	25W	25W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	2600±10%Lm	2600±10%Lm
CRI	Ra≥80	Ra≥80
Beam angle	120°	120°
Dimension	Ø270 x 54.5 mm	Ø270 x 54.5 mm
Working temperature	0-40℃	0-40℃
Base	2m VDE rubber cable	2m VDE rubber cable
Material	316/V4A S/S + PC cover	316/V4A S/S + PC cover
Constant driver	Yes	Yes
IP rating	IP68	IP68
Control method	2 Cable wire control	2 Cable wire control
Warranty	3 years	3 years
CE/RoHs	Yes	Yes
Applications	Swimming pool, water-fall, park, fountain spring, garden.	